

### GENERAL DESCRIPTION

The SGM8429C-4 consists of four independent, high-gain frequency-compensated operational amplifiers which are designed to operate from a single supply or dual supplies over a wide range of voltages.

The SGM8429C-4 is available in a Green TQFN-3×3-16L package. It is specified over the -40°C to +125°C temperature range.


### APPLICATIONS

Blu-ray Players and Home Theaters  
 Chemical and Gas Sensors  
 DVD Recorders and Players  
 Digital Multimeter: Benches and Systems  
 Digital Multimeter: Handhelds  
 Field Transmitter: Temperature Sensors  
 Motor Control: AC Induction, Brushed DC, Brushless DC, High-Voltage, Low-Voltage, Permanent Magnet, and Stepper Motors  
 Oscilloscopes  
 TV: LCDs and Digital  
 Temperature Sensors or Controllers Using Modbus  
 Weigh Scales

### FEATURES

- **Wide Supply Ranges:**  
     **Single Supply: 3V to 32V**  
     **Dual Supplies:  $\pm 1.5V$  to  $\pm 16V$**
- **Low Supply Current: 860 $\mu A$  (TYP)**
- **Gain-Bandwidth Product: 1.1MHz**
- **Input Common Mode Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Low Input Offset Voltage: 6mV (MAX)**
- **Low Input Offset Current: 10pA (TYP)**
- **Low Input Bias Current: 10pA (TYP)**
- **Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage: 32V**
- **Open-Loop Differential Voltage Gain: 111dB (TYP)**
- **Internal Frequency Compensation**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green TQFN-3×3-16L Package**

### PIN CONFIGURATION

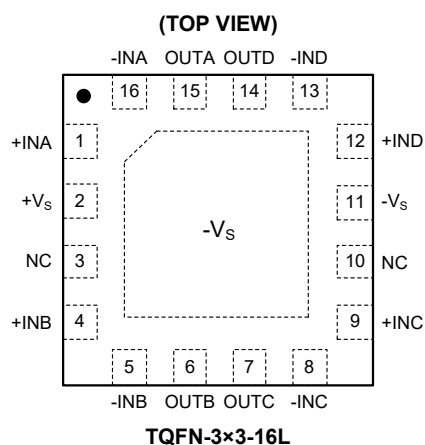

NOTE: Exposed pad can be connected to -Vs or left floating.


## PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8429C-4	TQFN-3×3-16L	-40°C to +125°C	SGM8429C-4XTQ16G/TR	CIFTQ XXXXX	Tape and Reel, 4000

## MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage Range, $V_S$ <sup>(1)</sup>	-0.3V to 32V
Differential Input Voltage Range, $V_{ID}$ <sup>(2)</sup>	-32V to 32V
Input Voltage (Either Input) Range	-0.3V to 32V
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	6000V
CDM	1000V

## RECOMMENDED OPERATING CONDITIONS

Input Common Mode Voltage Range	-0.1V to $V_S - 1.5V$
Operating Temperature Range	-40°C to +125°C

## NOTES:

1. All voltage values (except differential voltages and  $V_S$  specified for the measurement of  $I_{SC}$ ) are with respect to the network GND.
2. Differential voltages are at +IN, with respect to -IN.

## OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

## ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

## DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.







## ELECTRICAL CHARACTERISTICS

(At  $T_A = +25^\circ\text{C}$ ,  $V_S = 3\text{V}$  to  $32\text{V}$ ,  $R_L = 10\text{k}\Omega$  connected to  $V_S/2$ ,  $-0.1\text{V} < V_{CM} < V_S - 1.5\text{V}$ , Full =  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics							
Input Offset Voltage	V <sub>OS</sub>		+25°C		1.2	6	mV
			Full			7	
Input Bias Current	I <sub>B</sub>	V <sub>CM</sub> = V <sub>S</sub> /2	+25°C		10	200	pA
Input Offset Current	I <sub>OS</sub>	V <sub>CM</sub> = V <sub>S</sub> /2	+25°C		10	200	pA
Input Common Mode Voltage Range	V <sub>CM</sub>		Full	-0.1		V <sub>S</sub> - 1.5	V
Common Mode Rejection Ratio	CMRR	-0.1V < V <sub>CM</sub> < V <sub>S</sub> - 1.5V	+25°C	82	100		dB
			Full	72			
Open-Loop Voltage Gain	A <sub>OL</sub>	R <sub>L</sub> = 10kΩ to V <sub>S</sub> /2	+25°C	92	111		dB
			Full	83			
Output Characteristics							
Output Voltage Swing from Rail	V <sub>OH</sub>	R <sub>L</sub> = 10kΩ	+25°C		42	60	mV
	V <sub>OL</sub>		Full			80	
			+25°C		110	190	
			Full			240	
Output Short-Circuit Current	I <sub>SC</sub>		+25°C	12	18		mA
Power Supply							
Operating Voltage Range	V <sub>S</sub>		Full	3		32	V
Quiescent Current	I <sub>Q</sub>	I <sub>OUT</sub> = 0	+25°C		860	1250	μA
			Full			1900	
Power Supply Rejection Ratio	PSRR		+25°C	102	122		dB
			Full	98			
Dynamic Performance (C <sub>L</sub> = 100pF)							
Gain-Bandwidth Product	GBP		+25°C		1.1		MHz
Slew Rate	SR	G = +1	+25°C		0.35		V/μs
Overload Recovery Time		V <sub>IN</sub> × G > V <sub>S</sub>	+25°C		2.3		μs
Turn-On Time		G = +1	+25°C		42		μs
Phase Margin	φ <sub>O</sub>		+25°C		60		°
NOISE							
Input Voltage Noise		f = 0.1Hz to 10Hz	+25°C		9		μV <sub>P-P</sub>
Input Voltage Noise Density	e <sub>n</sub>	f = 1kHz	+25°C		36		nV/√Hz







## TYPICAL PERFORMANCE CHARACTERISTICS

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

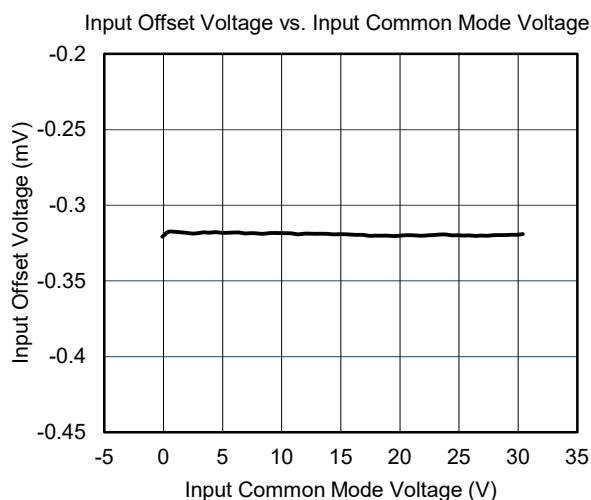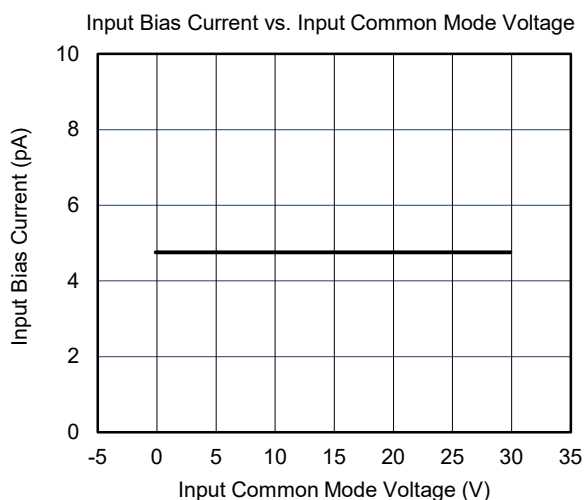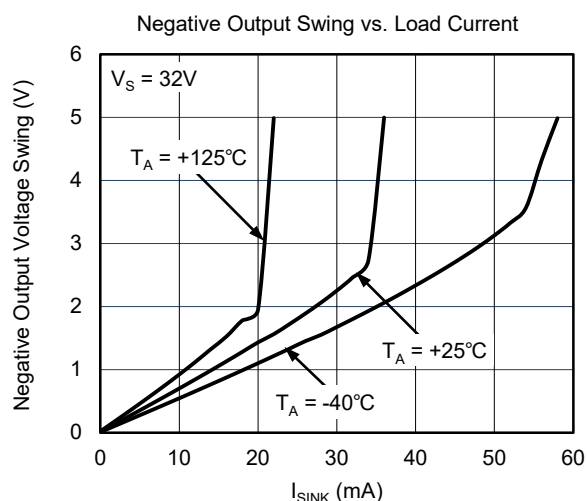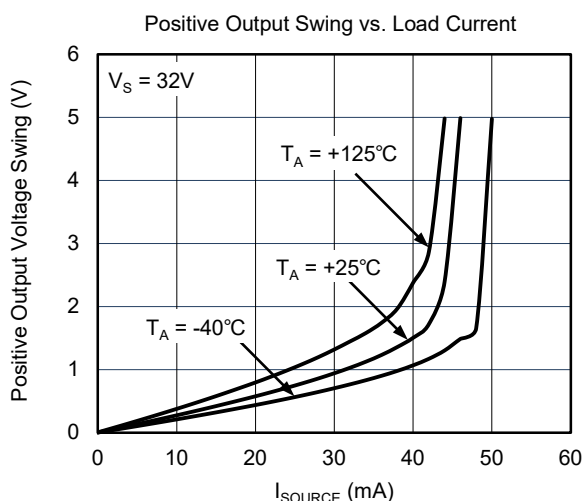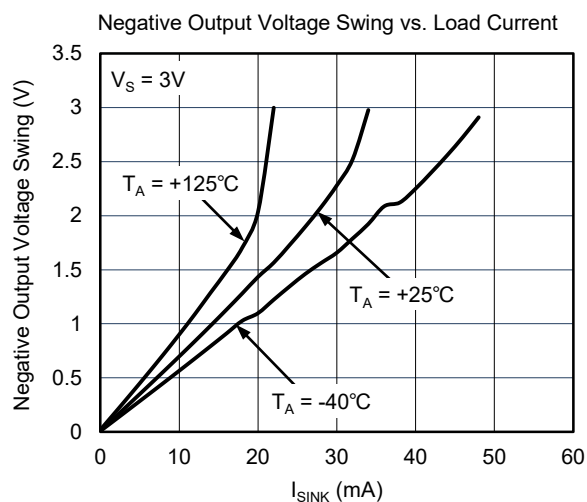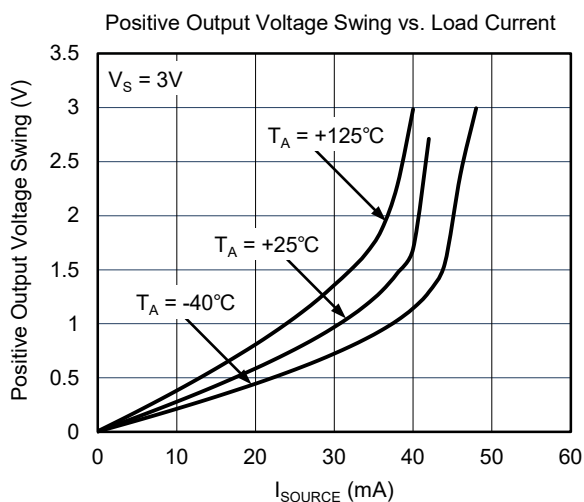







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

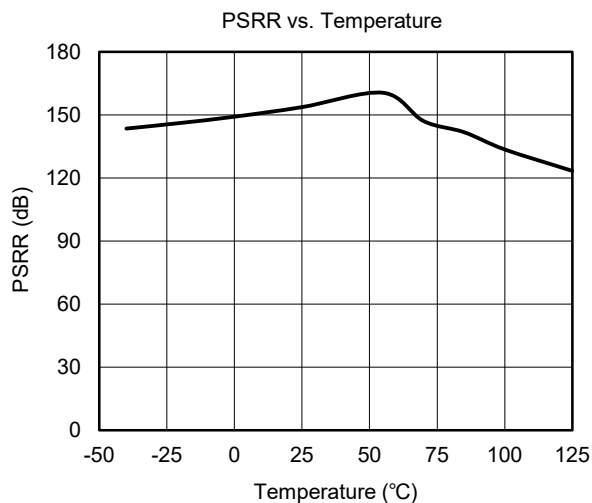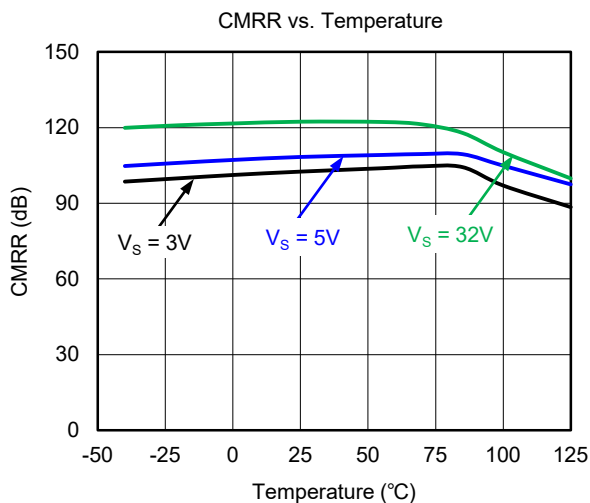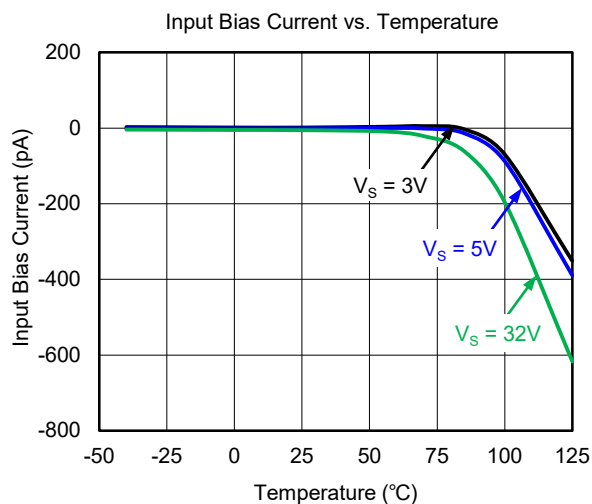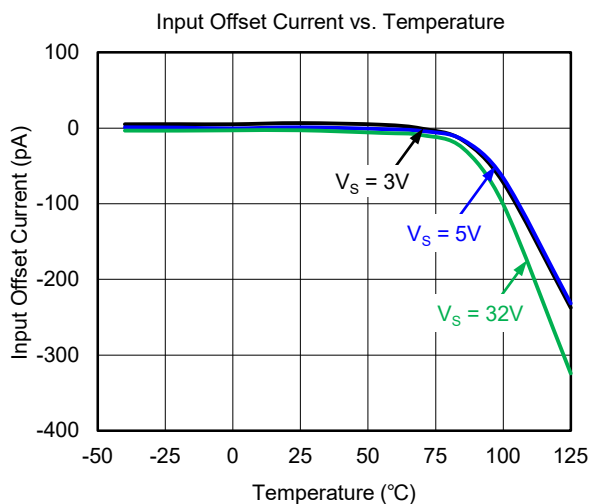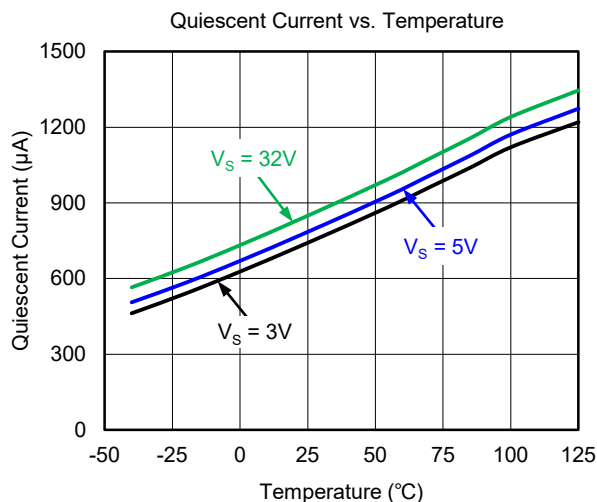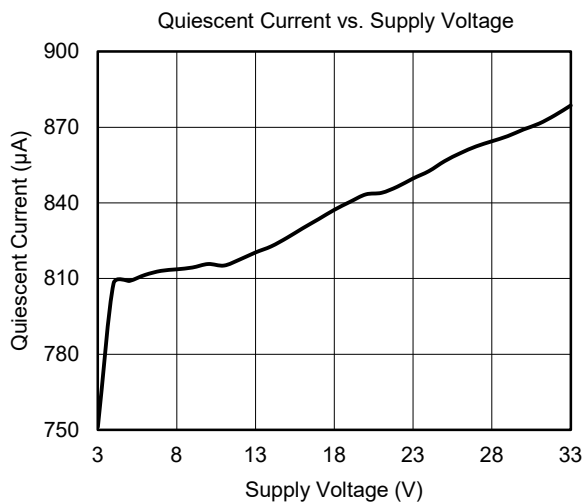







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

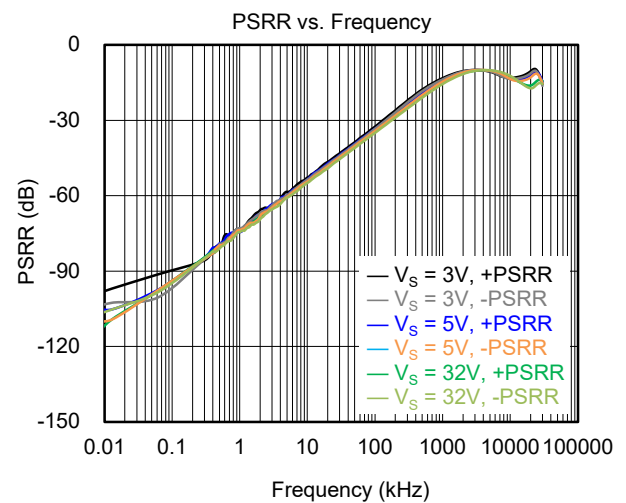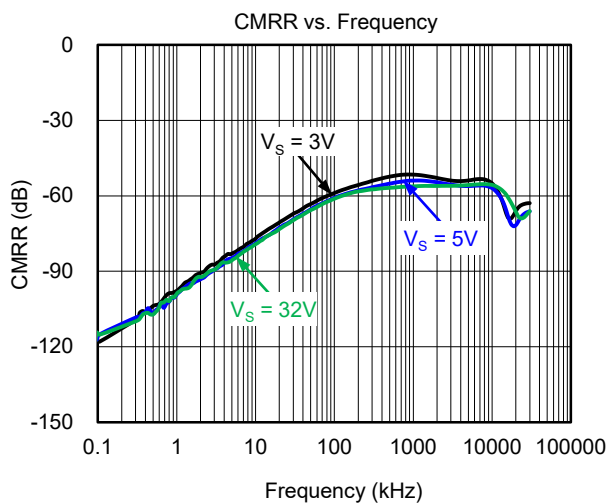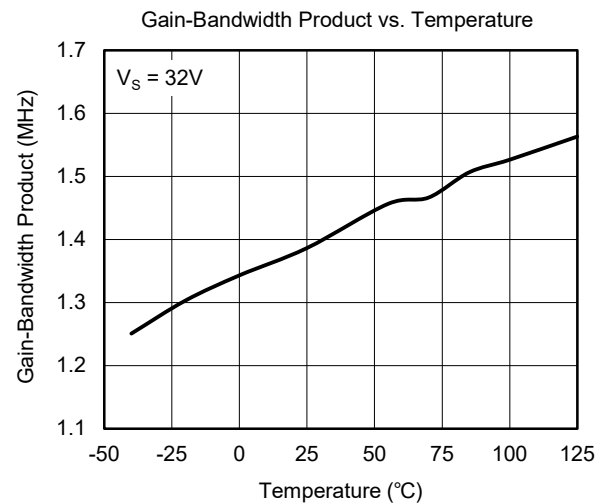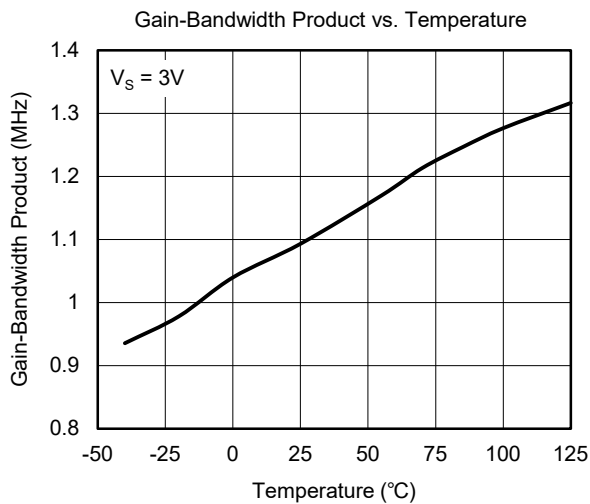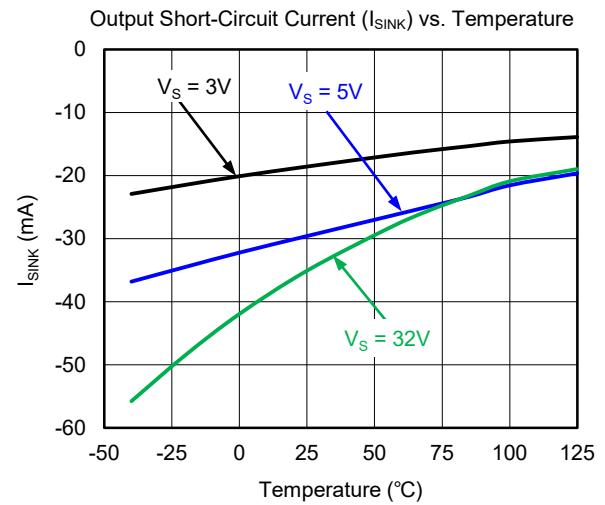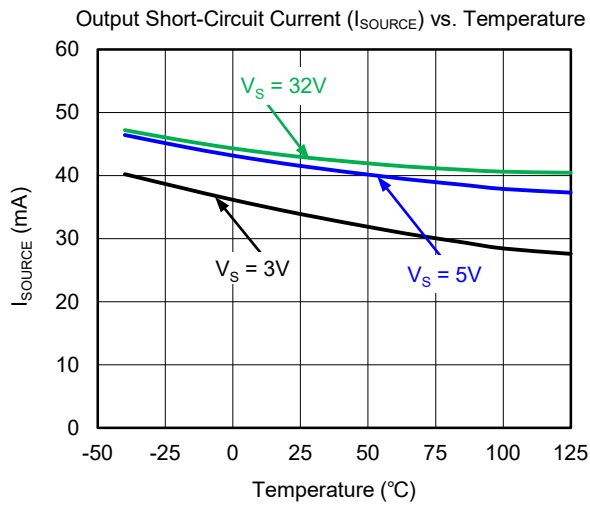







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

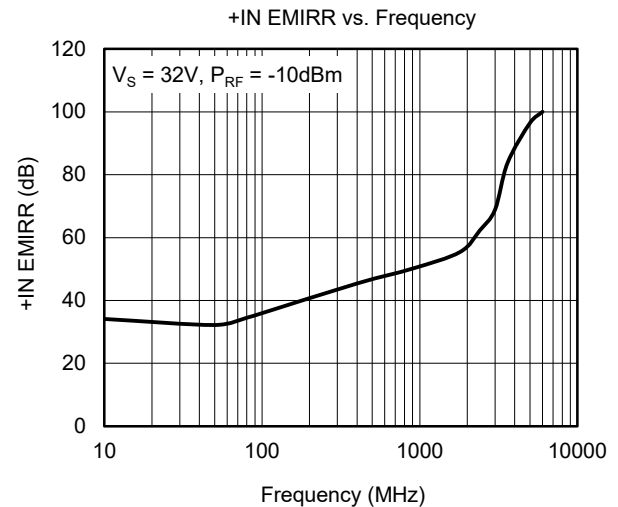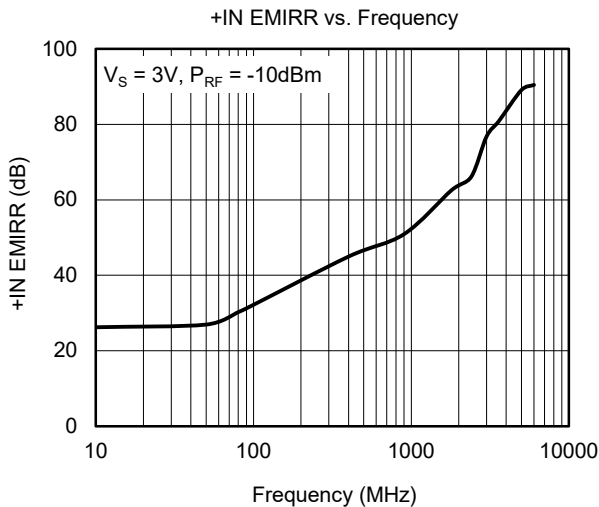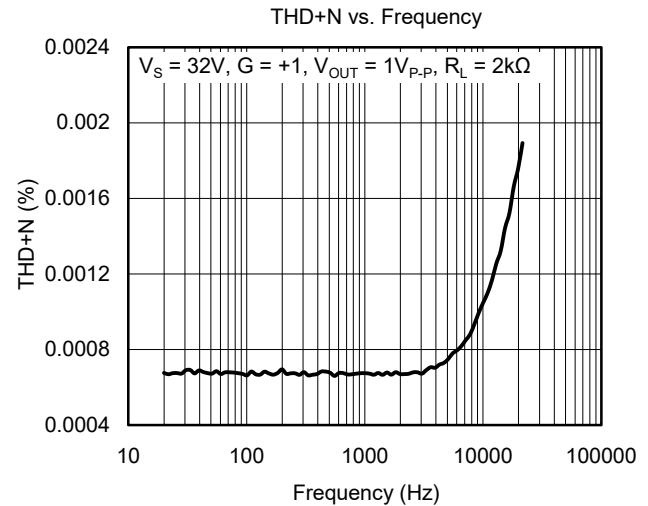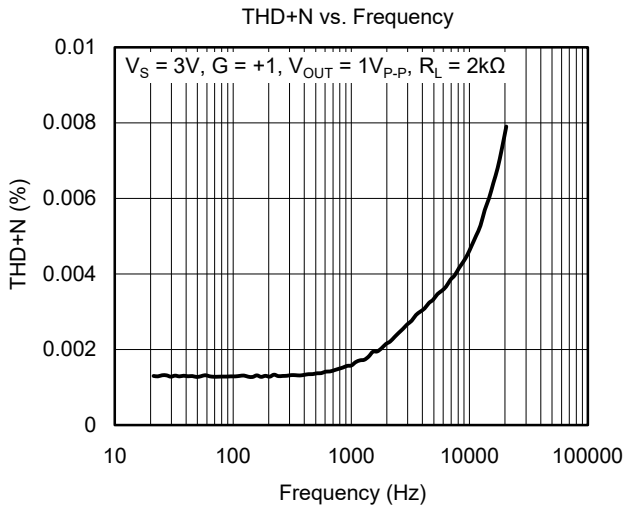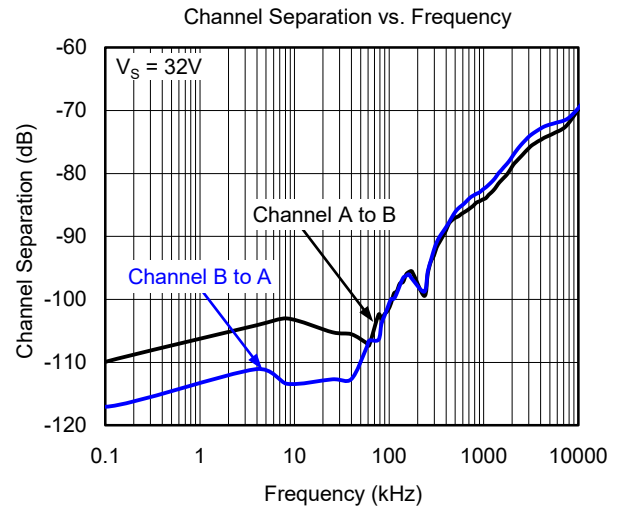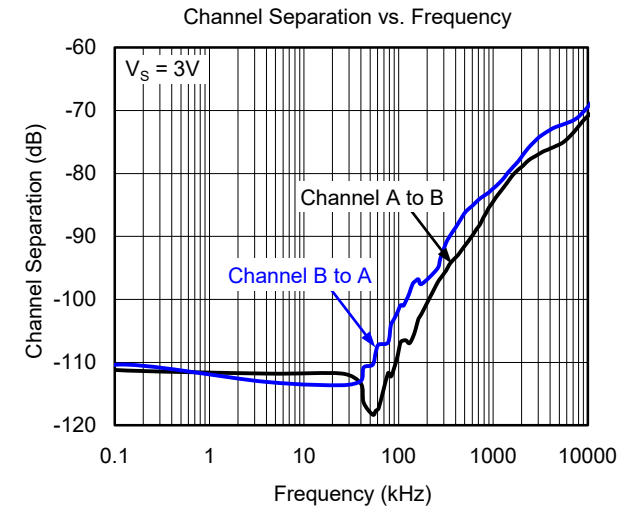

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)







At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

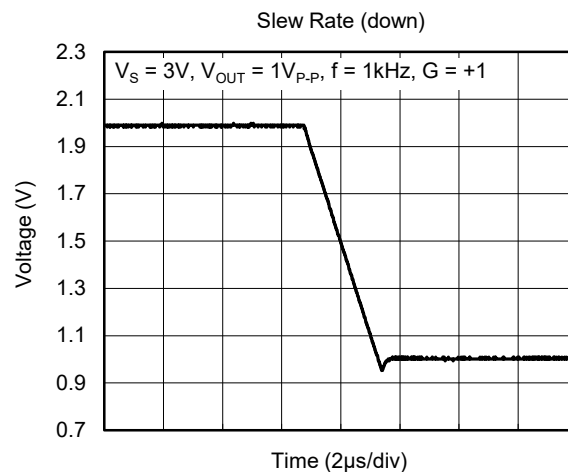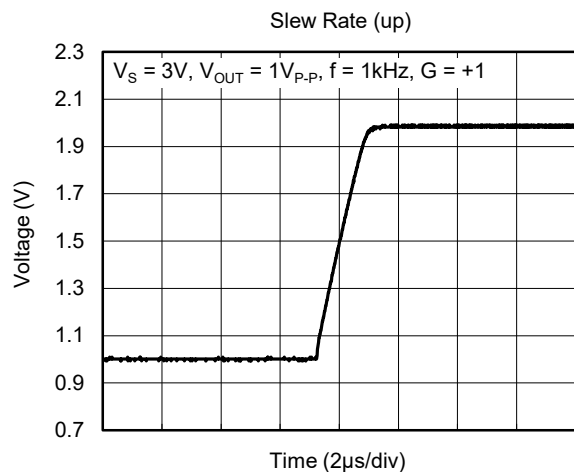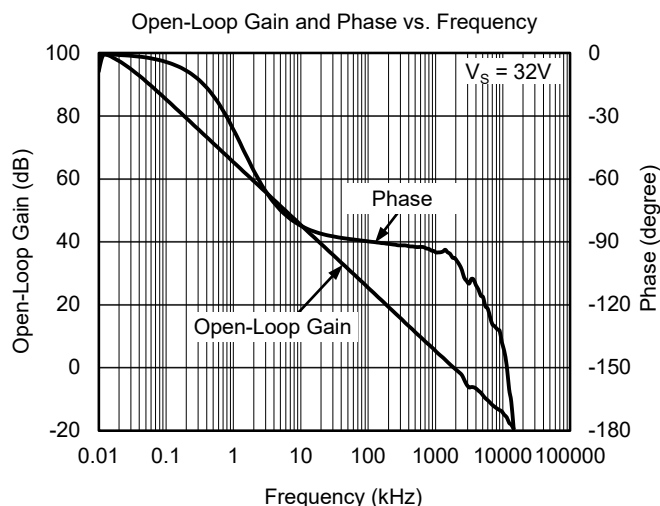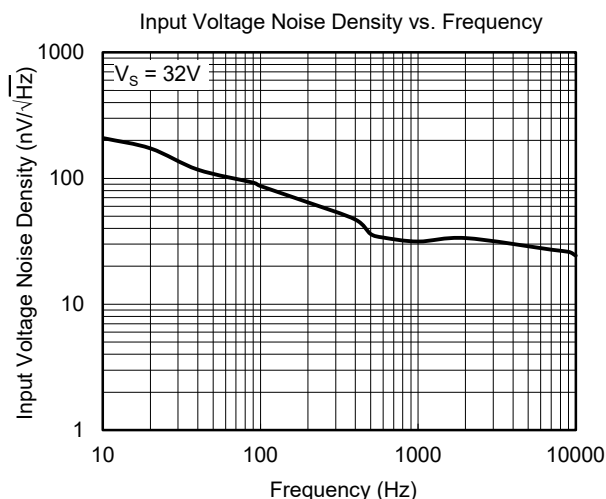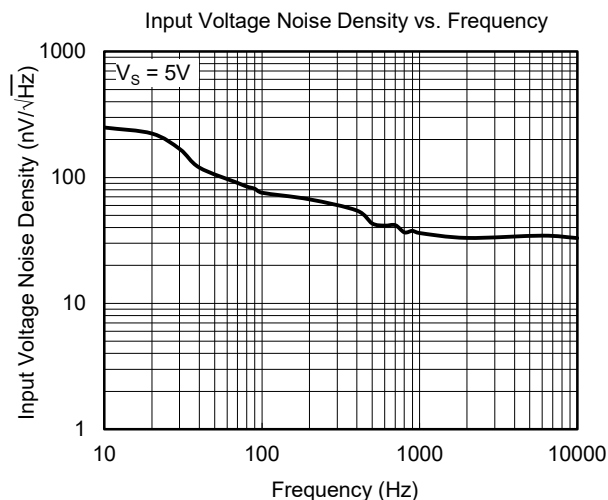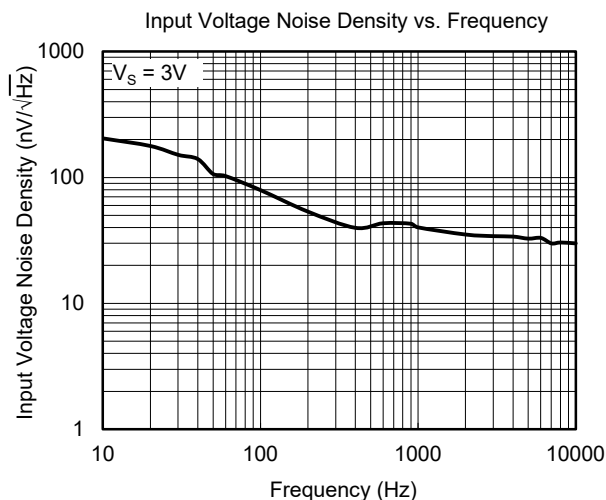









## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

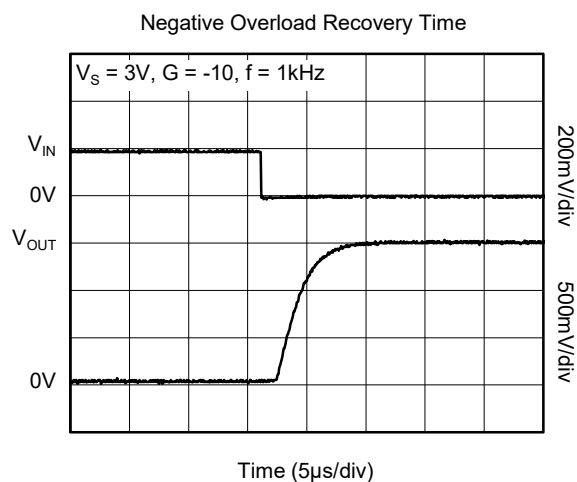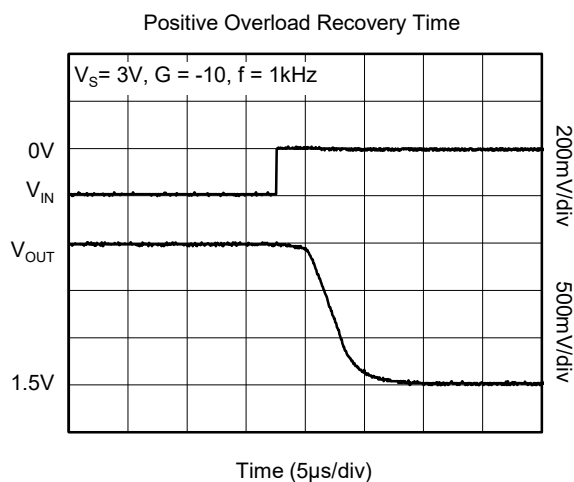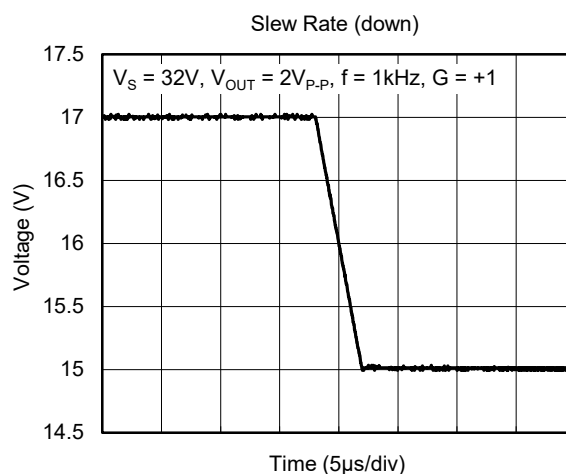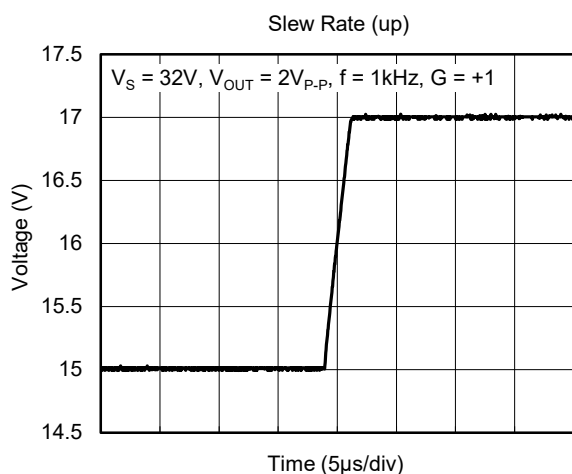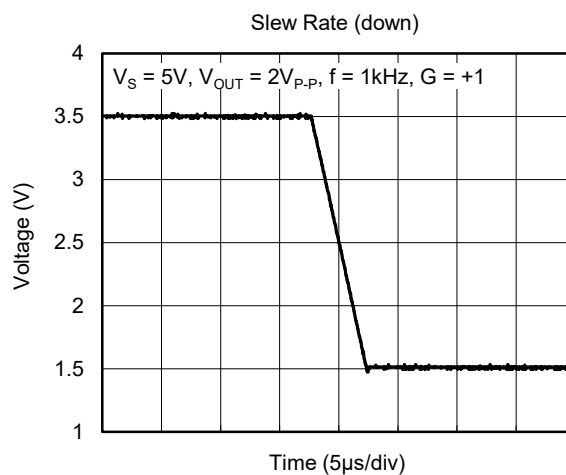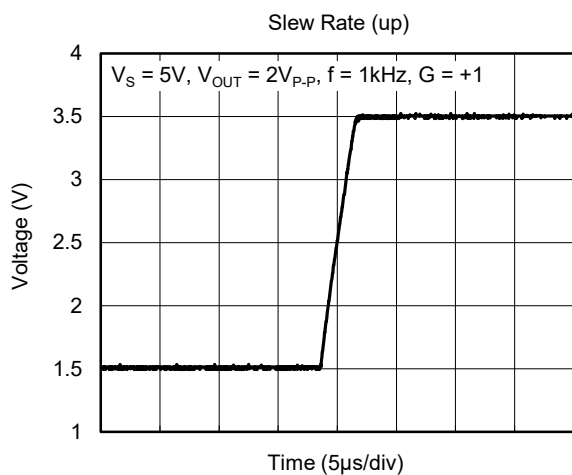

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

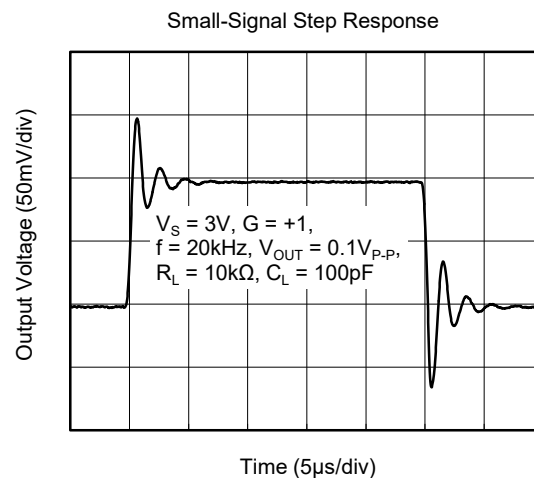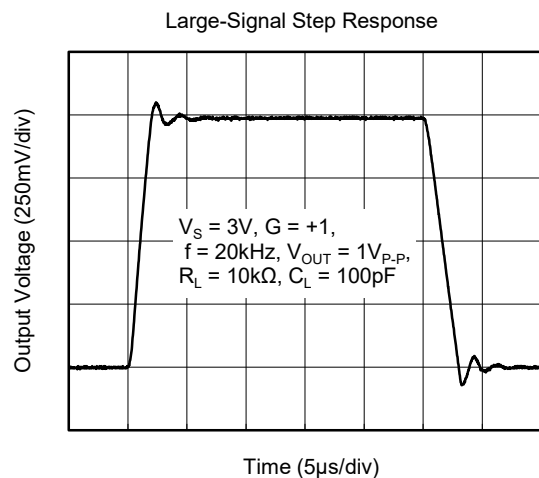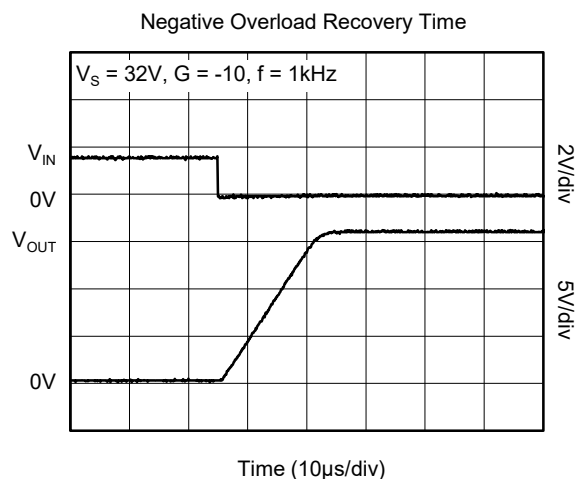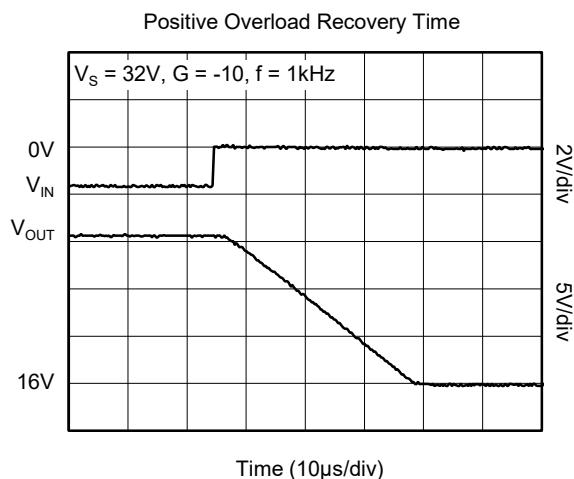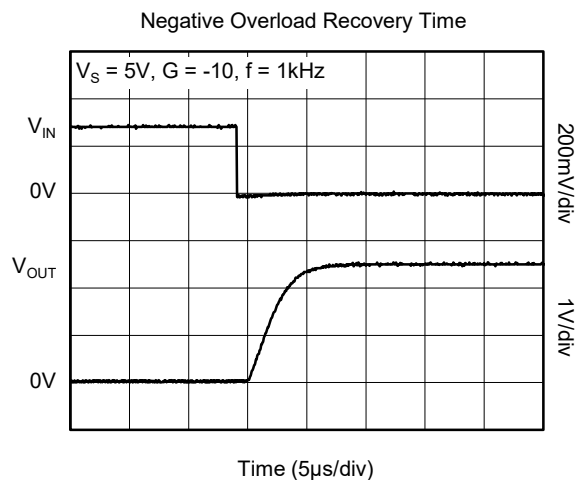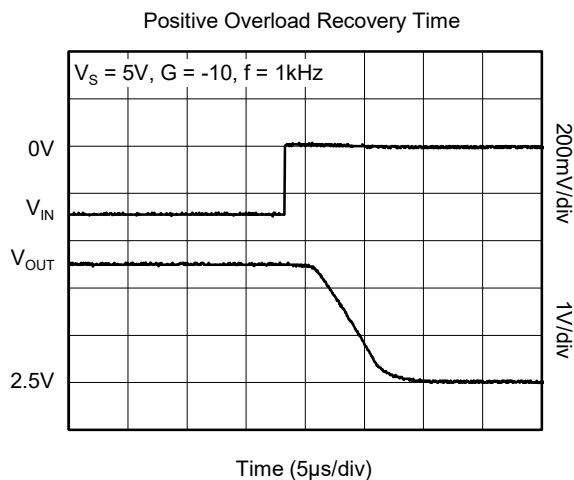


## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.


Large-Signal Step Response

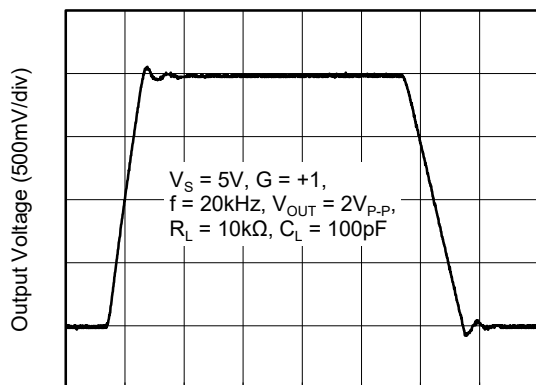


Small-Signal Step Response

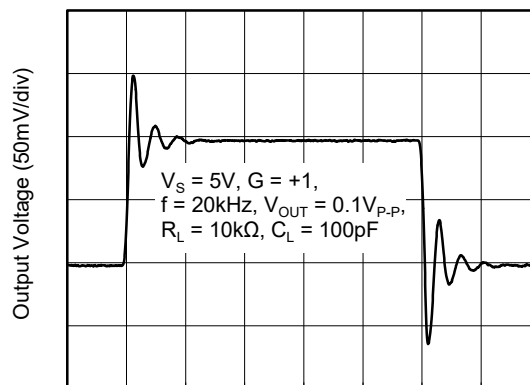


Large-Signal Step Response

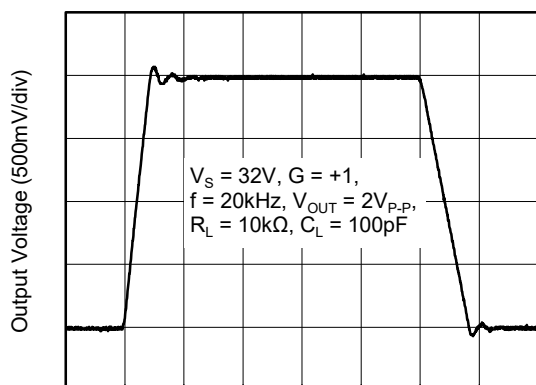


Small-Signal Step Response

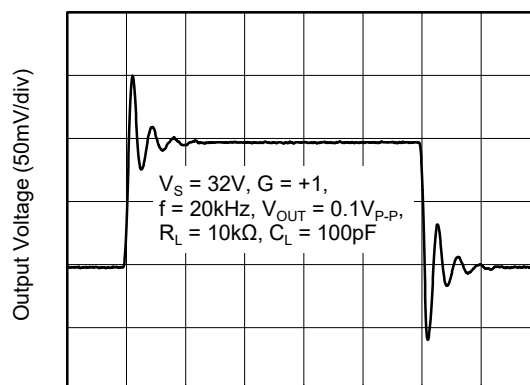

Turn-On Time






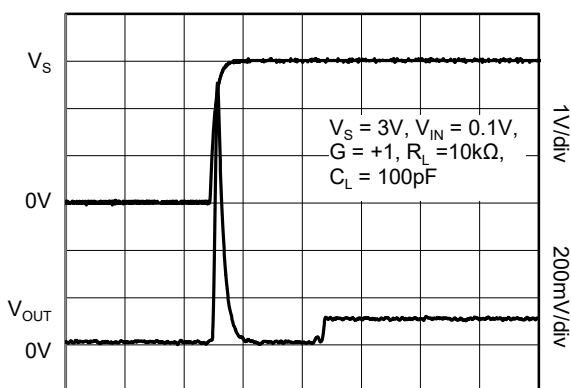


Turn-On Time

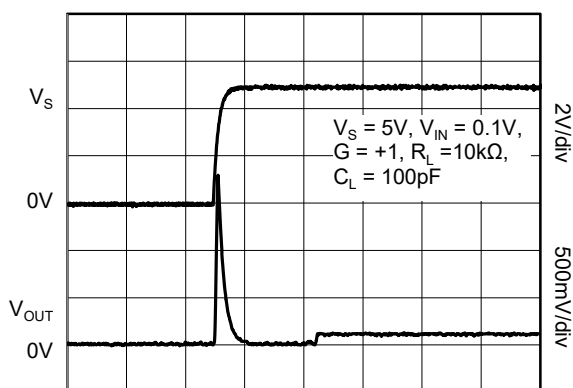





## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

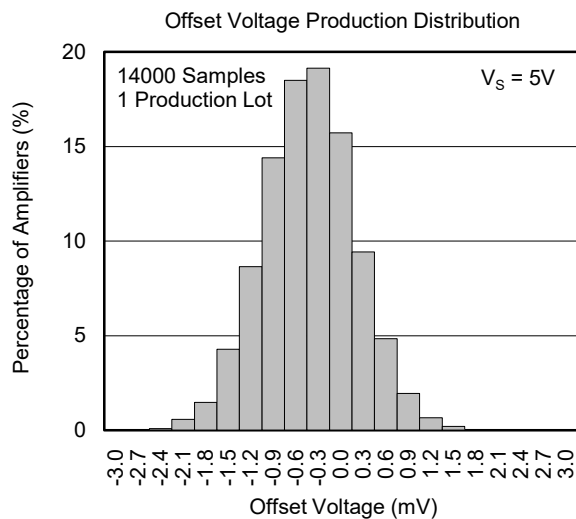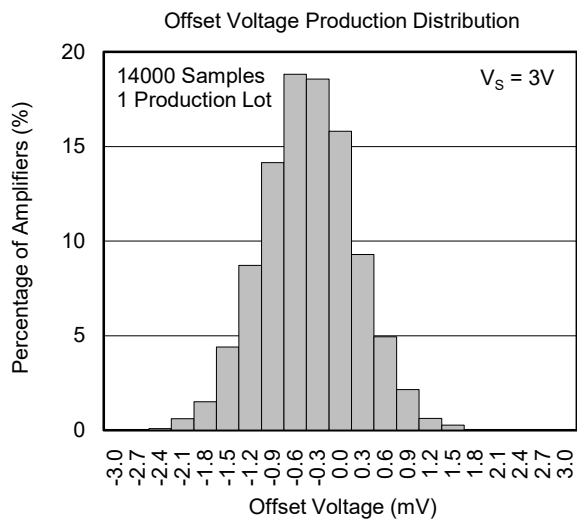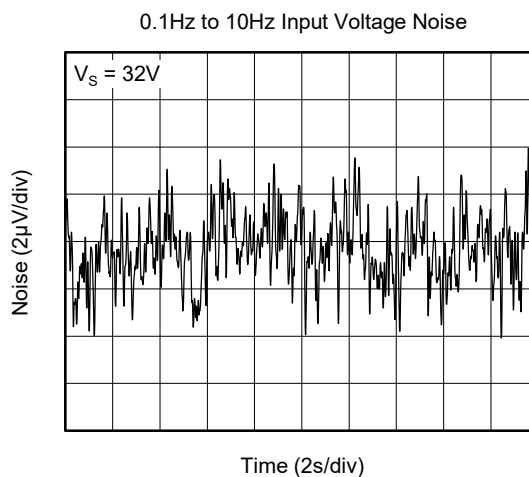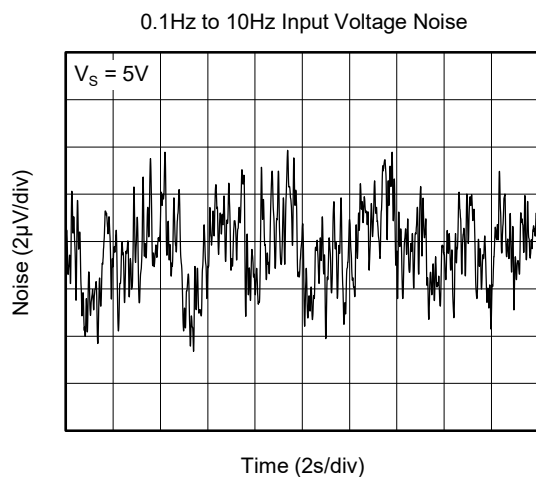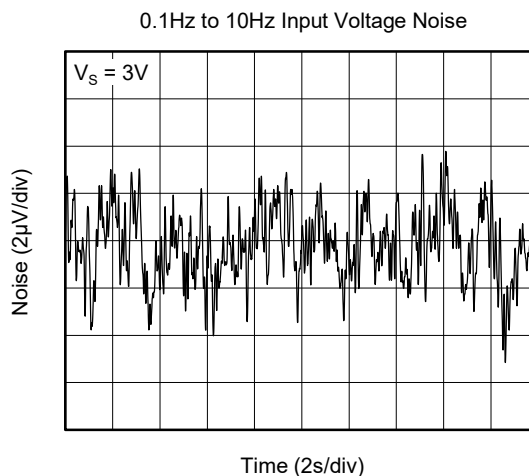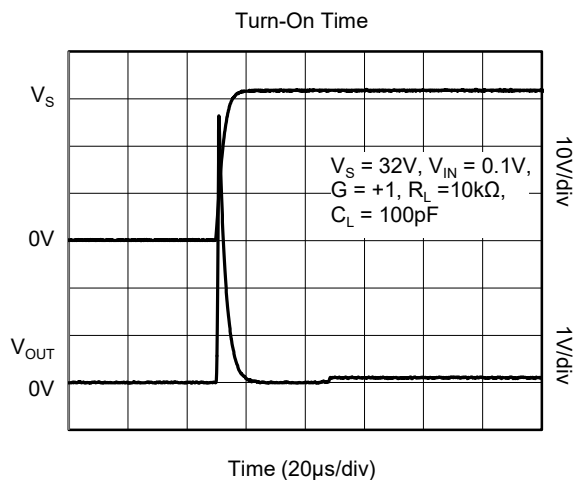

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At  $T_A = +25^\circ\text{C}$ ,  $V_{CM} = V_S/2$ , unless otherwise noted.

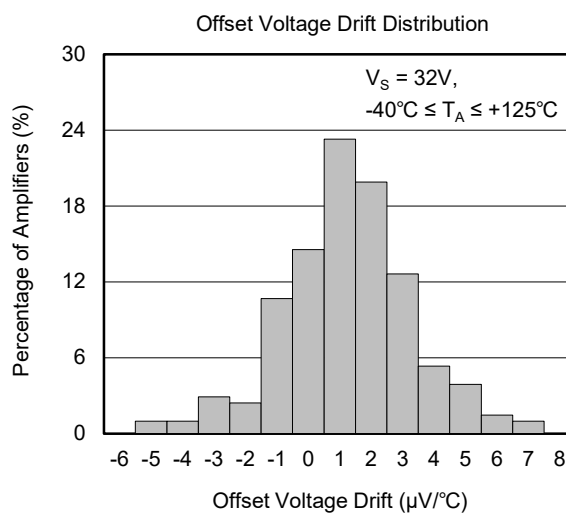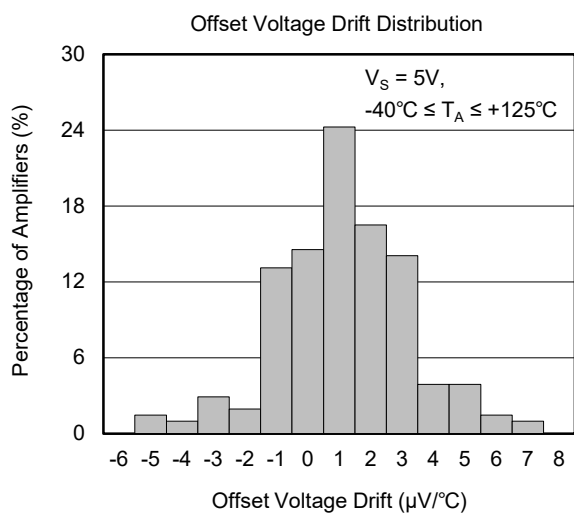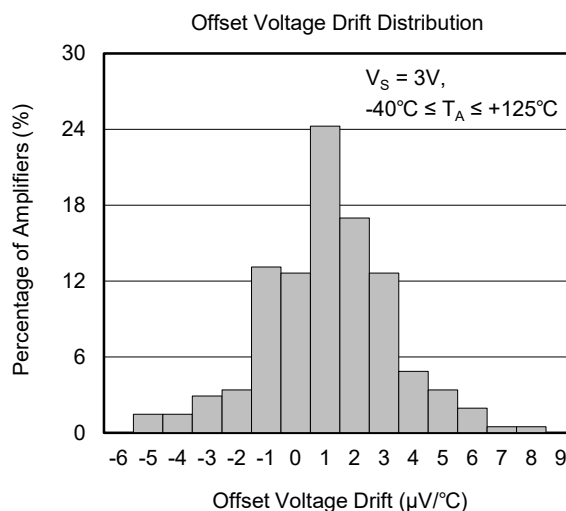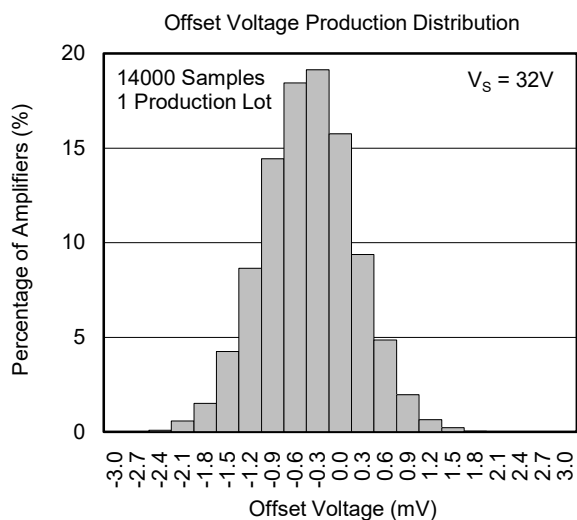

## DETAILED DESCRIPTION

The SGM8429C-4 consists of four independent, high-gain frequency-compensated operational amplifiers which are designed to operate from a single supply over a wide range of voltages. Operation from dual supplies is also possible if the difference between the two supplies is 3V to 32V, and  $V_S$  is at least 1.5V more positive than the input common mode voltage.

Applications include transducer amplifiers, DC amplification blocks, and all the conventional operational amplifier circuits that now can be implemented more easily in single-supply-voltage systems. For example, the device can be operated directly from the standard 5V supply used in digital systems and can easily provide the required interface electronics without additional  $\pm 5V$  supplies.

### Unity-Gain Bandwidth

The unity-gain bandwidth is the frequency up to which an amplifier with a unity gain may be operated without greatly distorting the signal. The device has a 1.1MHz unity-gain bandwidth.

### Slew Rate

The slew rate is the rate at which an operational amplifier can change its output when there is a change on the input. The device has a 0.35V/ $\mu$ s slew rate.

### Input Common Mode Voltage Range

The valid common mode voltage range is from device ground to  $V_S - 1.5V$ . Inputs may exceed  $V_S$  up to the maximum  $V_S$  without device damage. At least one input must be in the valid input common mode voltage range for output to be correct phase. If both inputs exceed valid range then output phase is undefined. If either input is less than -0.3V then input current should be limited to 1mA and output phase is undefined.

### Device Functional Modes

The device is powered on when the supply is connected. This device can be operated as a single-supply operational amplifier or a dual-supply amplifier depending on the application.

## APPLICATION INFORMATION

The SGM8429C-4 operational amplifier is useful in a wide range of signal conditioning applications. Inputs can be powered before  $V_S$  for flexibility in multiple supply circuits.

### Typical Application

A typical application for an operational amplifier is an inverting amplifier. This amplifier takes a positive voltage on the input and makes it a negative voltage of the same magnitude. In the same manner, it also makes negative voltages positive.

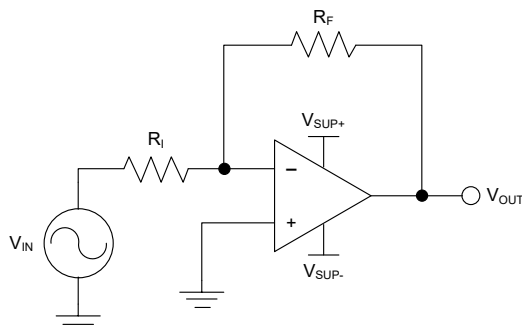


Figure 1. Application Schematic

The supply voltage must be chosen such that it is larger than the input voltage range and output range. For instance, this application will scale a signal of  $\pm 0.5V$  to  $\pm 1.8V$ . Setting the supply at  $\pm 12V$  is sufficient to accommodate this application.

Determine the gain required by the inverting amplifier using Equation 1 and Equation 2.

$$A_V = \frac{V_{OUT}}{V_{IN}} \quad (1)$$

$$A_V = \frac{1.8}{-0.5} = -3.6 \quad (2)$$

Once the desired gain is determined, choose a value for  $R_I$  or  $R_F$ . Choosing a value in the k $\Omega$  range is desirable because the amplifier circuit will use currents in the milliamp range. This ensures the part will not draw too much current. This example will choose 10k $\Omega$  for  $R_I$  which means 36k $\Omega$  will be used for  $R_F$ . This was determined by Equation 3.

$$A_V = -\frac{R_F}{R_I} \quad (3)$$


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Original (AUGUST 2020) to REV.A	Page
Changed from product preview to production data.....	All

## PACKAGE OUTLINE DIMENSIONS


### TQFN-3×3-16L




TOP VIEW

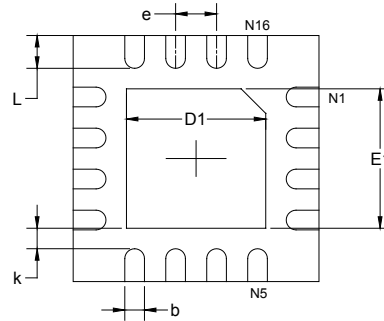

BOTTOM VIEW

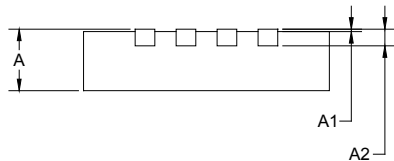

SIDE VIEW

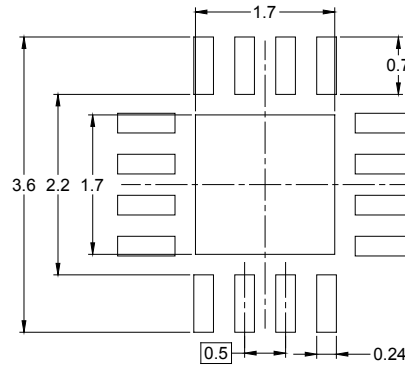

RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	2.900	3.100	0.114	0.122
D1	1.600	1.800	0.063	0.071
E	2.900	3.100	0.114	0.122
E1	1.600	1.800	0.063	0.071
k	0.200 MIN		0.008 MIN	
b	0.180	0.300	0.007	0.012
e	0.500 TYP		0.020 TYP	
L	0.300	0.500	0.012	0.020




## PACKAGE INFORMATION

### TAPE AND REEL INFORMATION

#### REEL DIMENSIONS

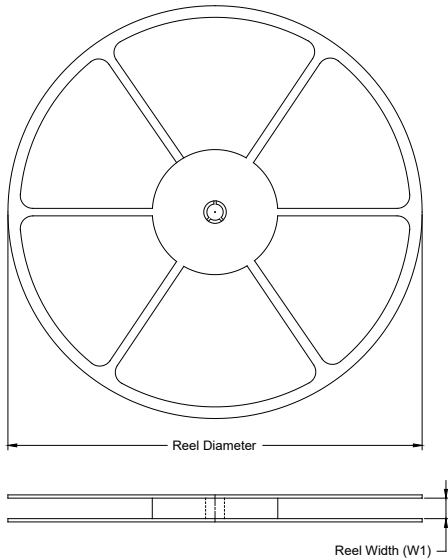

#### TAPE DIMENSIONS

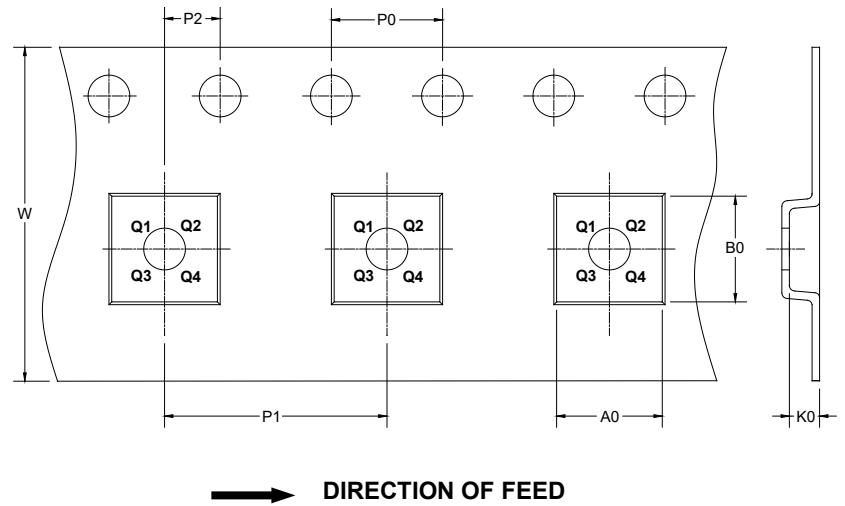

NOTE: The picture is only for reference. Please make the object as the standard.


#### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TQFN-3×3-16L	13"	12.4	3.35	3.35	1.13	4.0	8.0	2.0	12.0	Q2

DD00001

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS

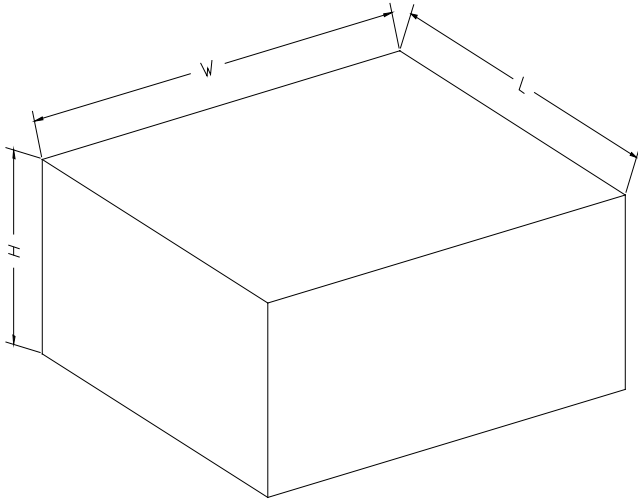

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002