



SGM8711

Micro-Power, RRIO, 1.8V Small Package, Push-Pull Output Comparator with Integrated Voltage Reference

GENERAL DESCRIPTION

The SGM8711 is a low power comparator with a typical power supply current of 2.2 μ A. It features an uncommitted on-chip voltage reference, comparator input common mode range of 200mV beyond the supply rails, and single-supply operation from 1.8V to 5.5V. The integrated 1.2V series voltage reference offers low 42 μ V/ $^{\circ}$ C drift, is stable with up to 10nF capacitive load, and can source up to 2mA (TYP) of output current.

Designed to operate over a wide range of supply voltages, from 1.8V to 5.5V, with guaranteed operation at 1.8V and 5.0V, the SGM8711 is ideal for use in a variety of battery-powered applications. With rail-to-rail input common mode voltage range, the SGM8711 is well suited for single-supply operation. Its small package makes this device ideal for use in handheld electronics and mobile phone applications.

The SGM8711 has a push-pull output stage.

SGM8711 is available in Green UTDFN-1.6 $\times$ 1.6-6L package. It is rated over the -40 $^{\circ}$ C to +85 $^{\circ}$ C temperature range.

FEATURES

- **Low Power Consumption:**
2.2 μ A (TYP) at $V_S = 1.8V$
- **Wide Supply Voltage Range: 1.8V to 5.5V**
- **Push-Pull Output Current Drive:**
18mA (TYP) at $V_S = 5V$
- **Rail-to-Rail Input**
- **Integrated 1.2V Voltage Reference**
- **-40 $^{\circ}$ C to +85 $^{\circ}$ C Operating Temperature Range**
- **Available in Green UTDFN-1.6 $\times$ 1.6-6L Package**

APPLICATIONS

RC Timers
Window Detectors
IR Receiver
Alarm and Monitoring Circuits

PACKAGE/ORDERING INFORMATION

MODEL	PIN- PACKAGE	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKAGE OPTION
SGM8711	UTDFN-1.6×1.6-6L	-40°C to +85°C	SGM8711YUDN6G/TR	TFX	Tape and Reel, 3000

NOTE: X = Date Code.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, $+V_S$ to $-V_S$	6V
V_{IN} Differential	$\pm(+V_S - (-V_S))$
Voltage at Input/Output Pins	$(-V_S) - 0.3V$ to $(+V_S) + 0.3V$
Operating Temperature Range	-40°C to +85°C
Junction Temperature	150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	260°C
ESD Susceptibility	
HBM	4000V
MM	400V

NOTE:


Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

SGMICRO reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. Please contact SGMICRO sales office to get the latest datasheet.

PIN CONFIGURATION (TOP VIEW)

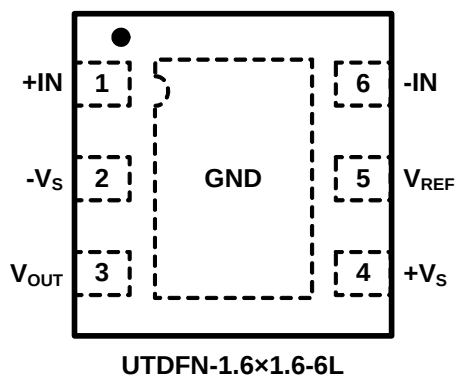

ELECTRICAL CHARACTERISTICS: $V_S = 1.8V$ (At $T_A = +25^\circ C$, $+V_S = 1.8V$, $-V_S = 0V$, $V_{CM} = +V_S/2$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	I_S	$I_O = 0$		2.2	4.1	μA
Input Offset Voltage	V_{OS}	$V_{CM} = 0V$		0.5	3.3	mV
		$V_{CM} = 1.8V$		0.5	3.3	
Input Offset Average Drift				2		$\mu V/^\circ C$
Common Mode Rejection Ratio	CMRR	$V_{CM} = 0V$ to $1.8V$	55	68		dB
Power Supply Rejection Ratio	PSRR	$V_S = 1.8V$ to $5.5V$, $V_{CM} = 0V$	74	102		dB
Power Supply Ramp-Up Rate ⁽¹⁾			5			V/s
Large Signal Voltage Gain	A_{VO}			100		dB
Output Swing High	V_{OH}	$I_O = 500\mu A$	1.617	1.675		V
		$I_O = 500\mu A$, $-40^\circ C \leq T_A \leq +85^\circ C$	1.572			
		$I_O = 1mA$	1.412	1.525		
		$I_O = 1mA$, $-40^\circ C \leq T_A \leq +85^\circ C$	1.330			
Output Swing Low	V_{OL}	$I_O = -500\mu A$		84	124	mV
		$I_O = -500\mu A$, $-40^\circ C \leq T_A \leq +85^\circ C$			163	
		$I_O = -1mA$		173	249	
		$I_O = -1mA$, $-40^\circ C \leq T_A \leq +85^\circ C$			347	
Output Current	I_{OUT}	Source	1.15	2		mA
		Source, $-40^\circ C \leq T_A \leq +85^\circ C$	1.0			
		Sink		-3.5	-2.0	
		Sink, $-40^\circ C \leq T_A \leq +85^\circ C$			-1.4	
Propagation Delay (High to Low)		Overdrive = 10mV		11.7		μs
		Overdrive = 100mV		5.6		
Propagation Delay (Low to High)		Overdrive = 10mV		24.2		μs
		Overdrive = 100mV		14.7		
Rise Time	t_{RISE}	Overdrive = 10mV, $C_L = 30pF$, $R_L = 1M\Omega$		168		ns
		Overdrive = 100mV, $C_L = 30pF$, $R_L = 1M\Omega$		174		
Fall Time	t_{FALL}	Overdrive = 10mV, $C_L = 30pF$, $R_L = 1M\Omega$		75		ns
		Overdrive = 100mV, $C_L = 30pF$, $R_L = 1M\Omega$		50		
Noise of V_{REF}		$f = 0.1Hz$ to $10Hz$		0.3		mV _{p-p}
VOLTAGE REFERENCE						
Reference Voltage	V_{REF}	$I_{REF} = 0mA$	1.182	1.200	1.218	V
Reference Voltage Drift				42		$\mu V/^\circ C$
Reference Output Current (Source)				2		mA

ELECTRICAL CHARACTERISTICS: $V_S = 5.0V$ (At $T_A = +25^\circ C$, $+V_S = 5V$, $-V_S = 0V$, $V_{CM} = +V_S/2$, unless otherwise noted.)







PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	I_S	$I_O = 0$		2.3	4.4	μA
Input Offset Voltage	V_{OS}	$V_{CM} = 0V$		0.5	3.3	mV
		$V_{CM} = 5V$		0.5	3.3	
Input Offset Average Drift				2		$\mu V/^\circ C$
Common Mode Rejection Ratio	CMRR	$V_{CM} = 0V$ to $5V$	63	76		dB
Power Supply Rejection Ratio	PSRR	$V_S = 1.8V$ to $5.5V$, $V_{CM} = 0V$	74	102		dB
Power Supply Ramp-Up Rate ⁽¹⁾			5			V/s
Large Signal Voltage Gain	A_{VO}			110		dB
Output Swing High	V_{OH}	$I_O = 500\mu A$	4.935	4.952		V
		$I_O = 500\mu A$, $-40^\circ C \leq T_A \leq +85^\circ C$	4.926			
		$I_O = 1mA$	4.874	4.904		
		$I_O = 1mA$, $-40^\circ C \leq T_A \leq +85^\circ C$	4.855			
Output Swing Low	V_{OL}	$I_O = -500\mu A$		54	72	mV
		$I_O = -500\mu A$, $-40^\circ C \leq T_A \leq +85^\circ C$			79	
		$I_O = -1mA$		106	140	
		$I_O = -1mA$, $-40^\circ C \leq T_A \leq +85^\circ C$			154	
Output Current	I_{OUT}	Source	14.0	18		mA
		Source, $-40^\circ C \leq T_A \leq +85^\circ C$	10.5			
		Sink		-18	-15.5	
		Sink, $-40^\circ C \leq T_A \leq +85^\circ C$			-12.5	
Propagation Delay (High to Low)		Overdrive = 10mV		12.7		μs
		Overdrive = 100mV		5.6		
Propagation Delay (Low to High)		Overdrive = 10mV		38.1		μs
		Overdrive = 100mV		29.5		
Rise Time	t_{RISE}	Overdrive = 10mV, $C_L = 30pF$, $R_L = 1M\Omega$		39		ns
		Overdrive = 100mV, $C_L = 30pF$, $R_L = 1M\Omega$		40		
Fall Time	t_{FALL}	Overdrive = 10mV, $C_L = 30pF$, $R_L = 1M\Omega$		33		ns
		Overdrive = 100mV, $C_L = 30pF$, $R_L = 1M\Omega$		30		
Noise of V_{REF}		$f = 0.1Hz$ to $10Hz$		0.32		mV _{p-p}
VOLTAGE REFERENCE						
Reference Voltage	V_{REF}	$I_{REF} = 0mA$	1.182	1.200	1.218	V
Reference Voltage Drift				41		$\mu V/^\circ C$
Reference Output Current (Source)				2		mA

NOTE:







1. If the power supply ramp-up rate is lower than 5V/s, the reference voltage output is not guaranteed to start up.









TYPICAL PERFORMANCE CHARACTERISTICS

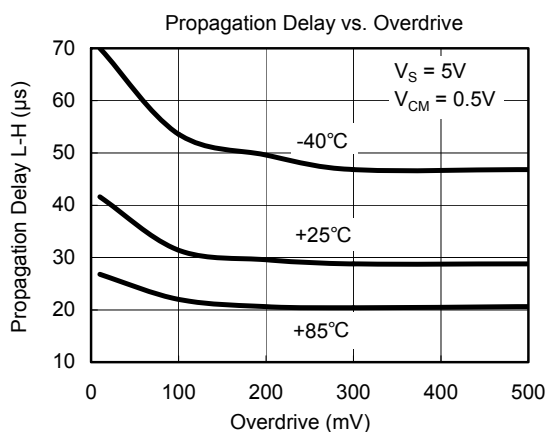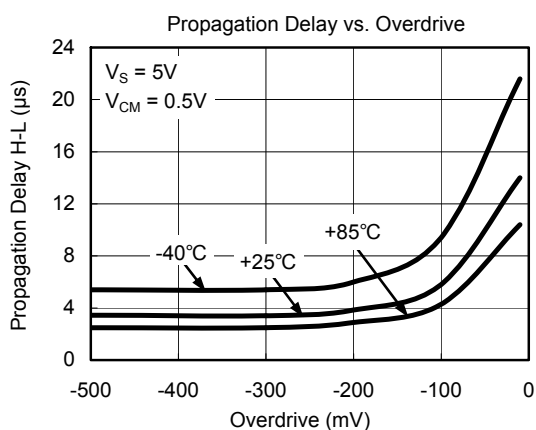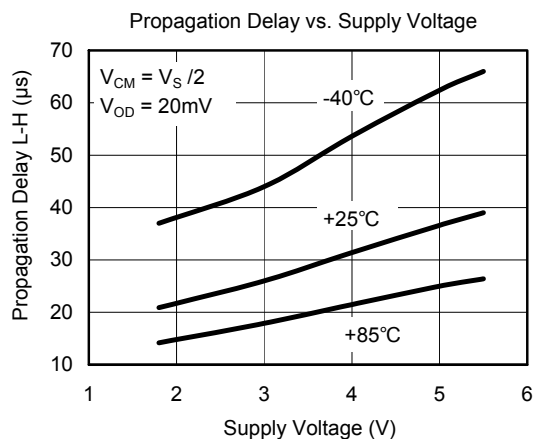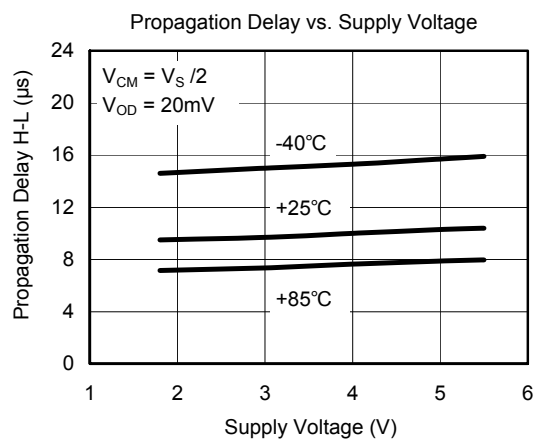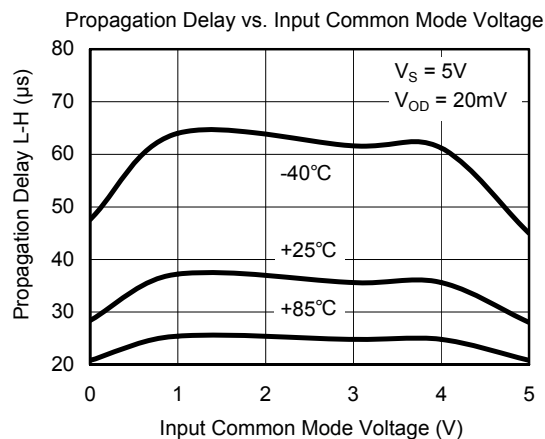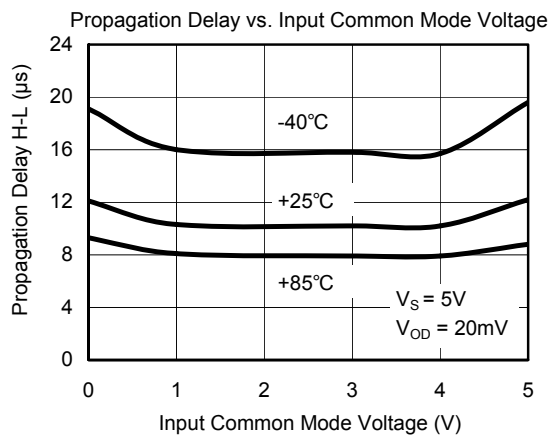





TYPICAL PERFORMANCE CHARACTERISTICS

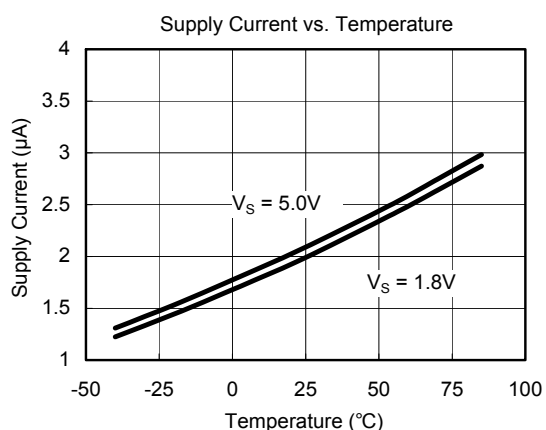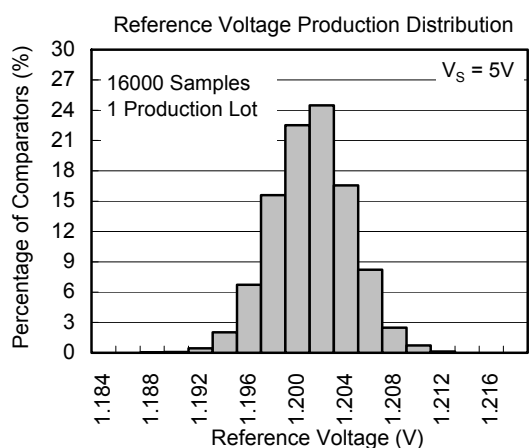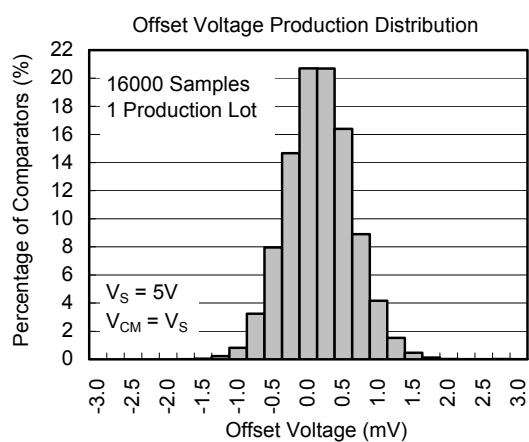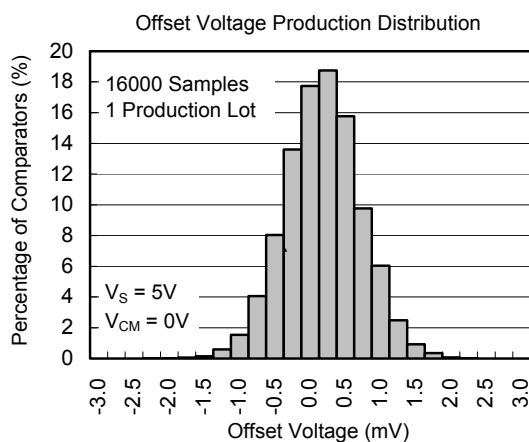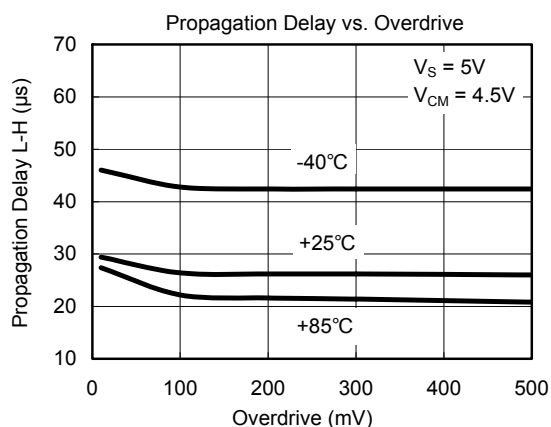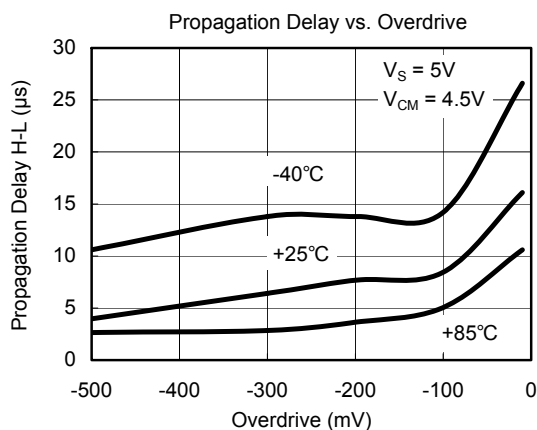

TYPICAL PERFORMANCE CHARACTERISTICS

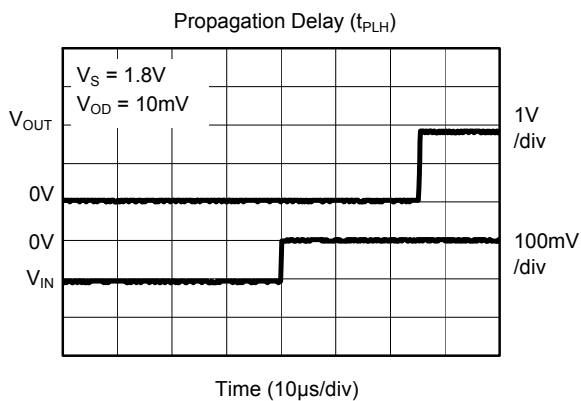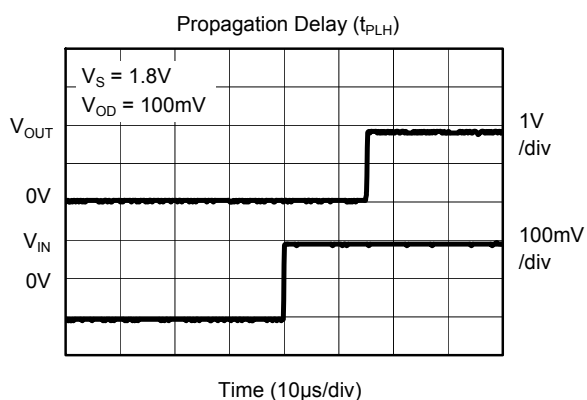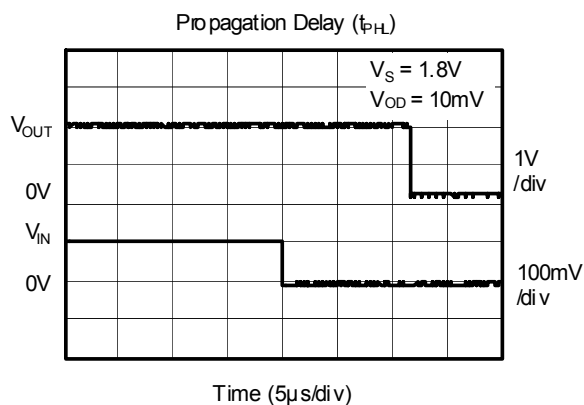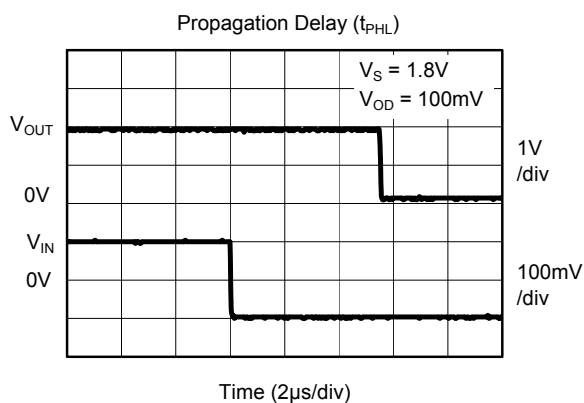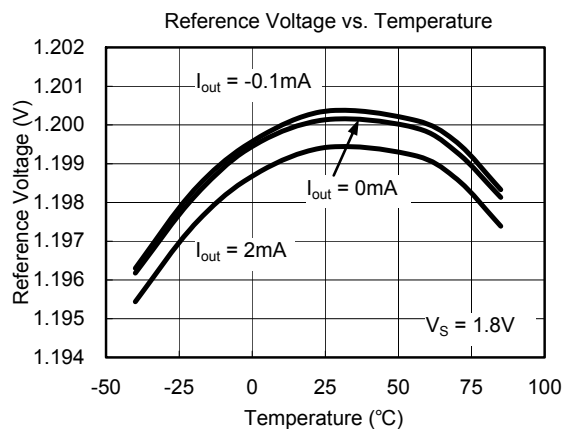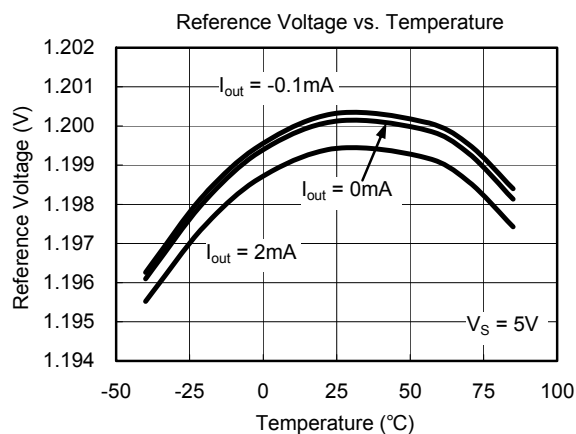


TYPICAL PERFORMANCE CHARACTERISTICS

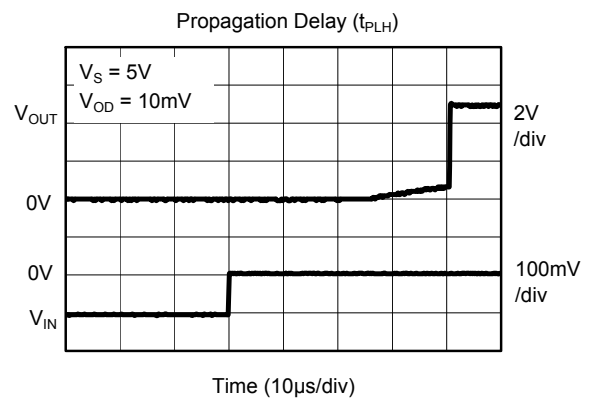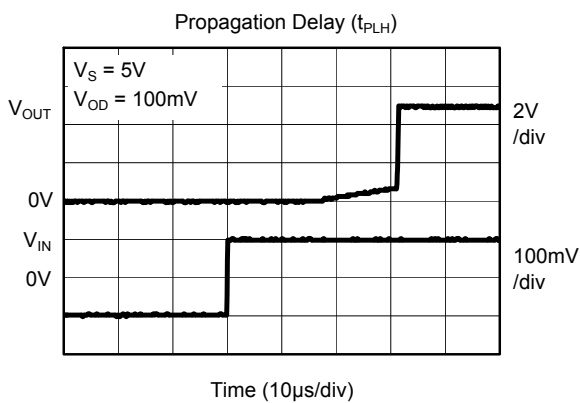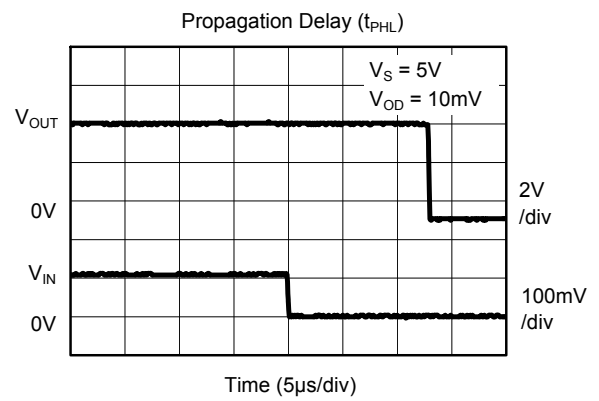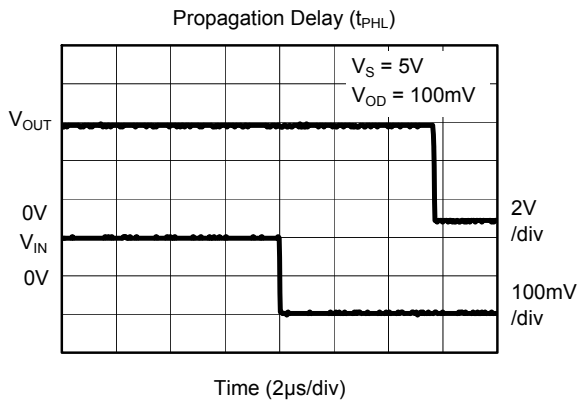

PACKAGE OUTLINE DIMENSIONS


UTDFN-1.6×1.6-6L

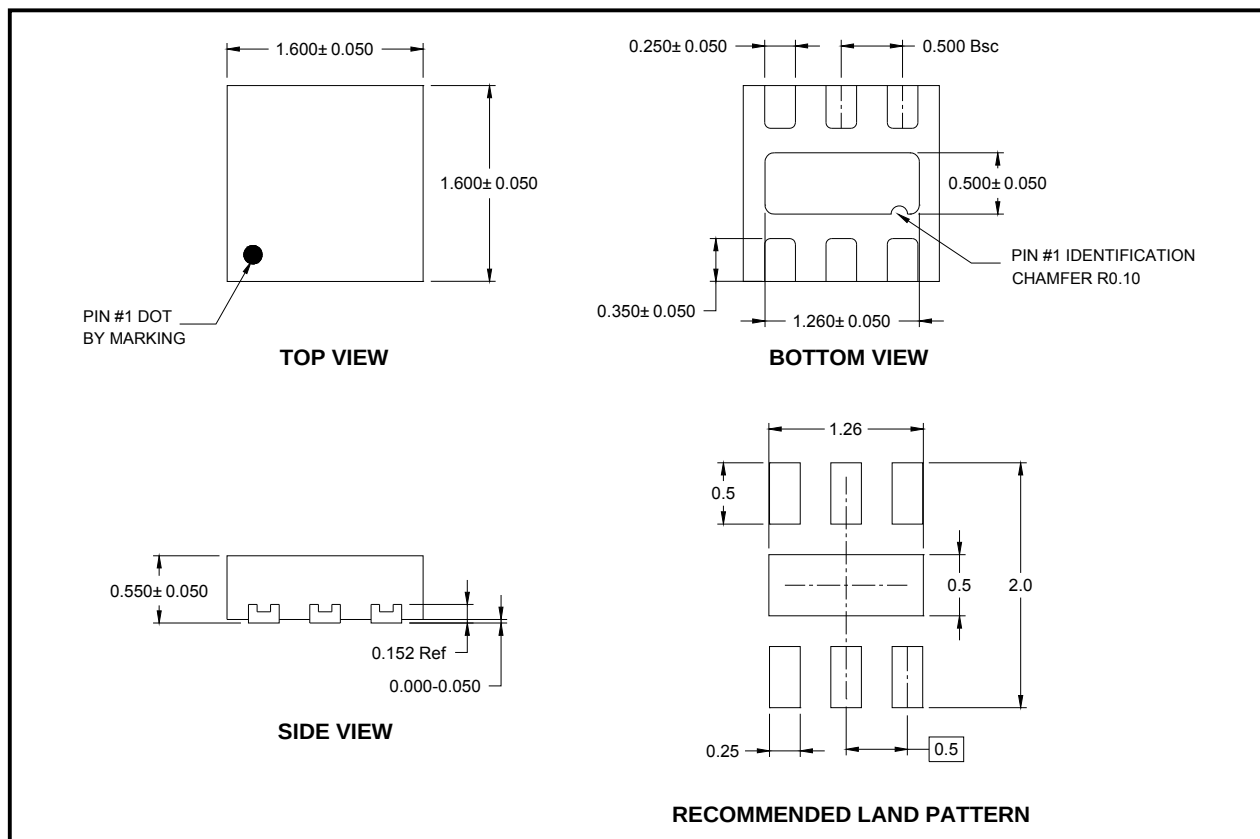


NOTE: All linear dimensions are in millimeters.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

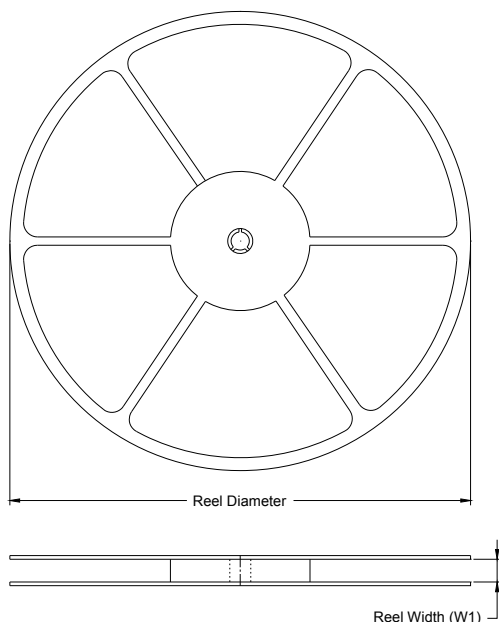


TAPE DIMENSIONS

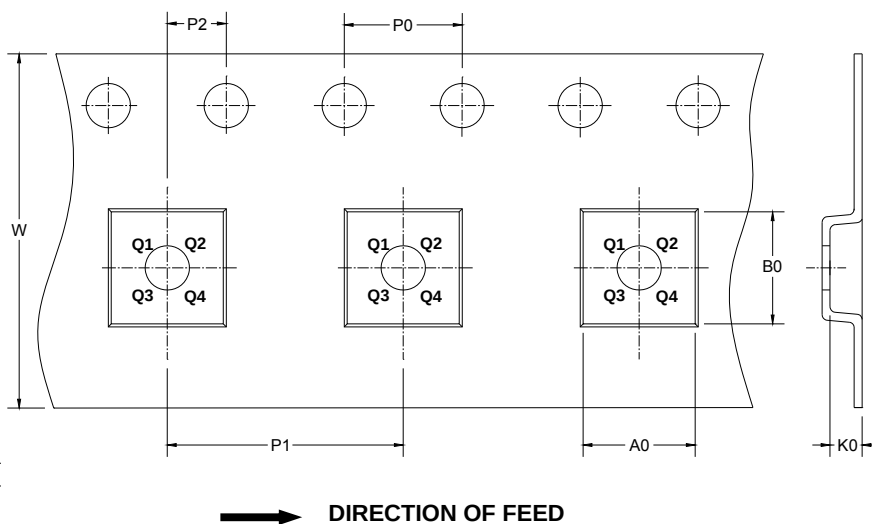

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1.6×1.6-6L	7"	9.0	1.78	1.78	0.69	4.00	4.00	2.00	8.00	Q1

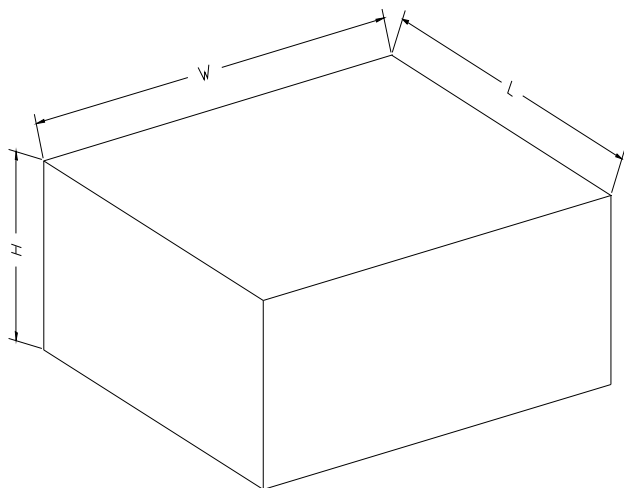CARTON BOX DIMENSIONS

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18